

SENSiQ[®] Weighdisc

WD 15 t ... 200 t

- The original, proven over more than 10 years, optimized to the latest state of technology
- Operating temperature von -40 °C ... 180 °C
- High precision combined error only 0.07%
- Air chamber to the direct bolted joint, No bearing elements needed
- Extremely robust construction, IP68
- Minimum installation space
- 6-wire technology and integrated Pt100



Application

- Ladle turret scale
- Ladle transfer car
- Scrap basket, roller and tundish scales
- Rail weighbridges
- Silo, container and furnace scales

Construction


- Very low installation height and installation space
- Two contact surfaces for a direct bolted joint
- Robust measuring element without membrane

Function

- Simple and cost-effective installation through direct bolted joints between the upper and lower connecting structure without moving parts
- High functional safety and availability, even with impact loads and constraining forces
- Minimum measuring value interference despite the transmission of large interference forces and moments
- For maintenance-free scales operated under harsh conditions
- High overload capability
- High reproducibility
- High long-term stability

Operating Principle

WD 15 t ... 200 t

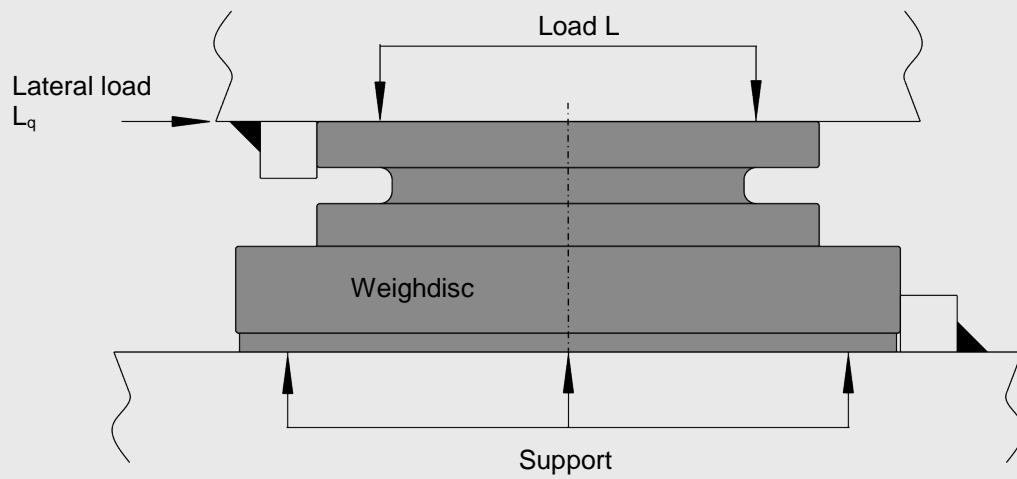


Technical Data

		WD 15 t	WD 25 t	WD 50 t	WD 100 t	WD 200 t	Ref
Nominal load	E_{max}	15 t	25 t	50 t	100 t	200 t	
Limit load (with $L_q = 0.15 \times L_l$) Limit load = max. safe load	L_l	75 t	75 t	150 t	300 t	600 t	
Breaking load (with $L_q = 0.15 \times L_d$)	L_d	125 t	125 t	250 t	500 t	1000 t	
Max. permitted lateral load	$L_{q, max}$	12 t	12 t	25 t	50 t	100 t	
Nominal characteristic value	C_n	0.54 mV / V					E_{max}
Compound error	F_{comb}	0.07 %					C_n
Creepage under load (30 min)	F_{cr}	0.05 %					C_n
Input resistance	R_e	778 $\Omega \pm 6 \Omega$					T_r
Output resistance	R_a	700 $\Omega \pm 4 \Omega$					T_r
Ref- supply voltage	U_{sref}	10 V					
Max. supply voltage	U_{smax}	36 V					
Nominal temperature	B_{tn}	-10 °C to +100 °C					
Operating temperature range	B_{tu}	-40 °C to +180 °C					
Reference temperature	T_r	+22 °C					
Storage temperature range	B_{ts}	-50 °C to +180 °C					
Temperature coefficient of the zero signal	TK_o	$\pm 0.07 \% / 10 K ^*)$					C_n in B_{tu}
Temperature coefficient of the characteristic value	TK_c	$\pm 0.15 \% / 10 K ^*)$					
Self-weight	m_e	10 kg	10 kg	10 kg	20 kg	47 kg	
Surface		galvanized,					
Protection class		IP68					
Cable specification		<p>The Weighdisc has a 200 mm connection cable with plug-pin connections. A separate, shielded cable (Ø 8.5 mm x 15 m) is also supplied with suitable plug socket.</p> <p>The following applies to the cable: Silicon cable, bend radius: > 40 mm; temperature range: -50 °C ...+180 °C</p>					
Cable connection allocation		<p>black: input + / input - red: output + / white: output - yellow: sense + / green: sense - purple: temperature sensor / brown: temperature sensor black/yellow: shielding</p> <p>(Not connected sense line – lines have to be insulated)</p>					

*) in isothermic state

Dimensions

WD 15 t ... 200 t

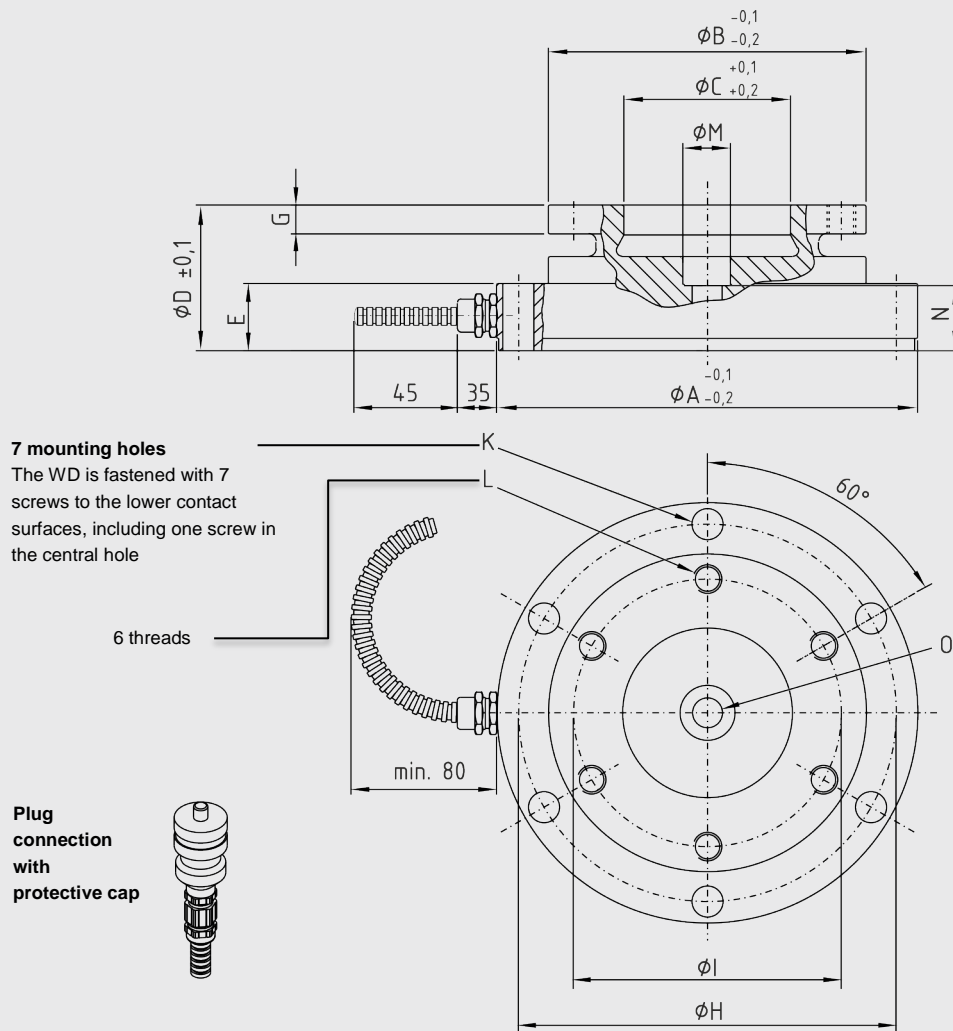


Dimensions [mm]

Model	A	B	C	D	E	G	H	I	K	L*	M	N	O
WD 15 t / 25 t	192	136	70	65	28	16	168	115	16.5	M16	26	20	16.5
WD 50 t	192	136	70	65	28	16	168	115	16.5	M16	26	24	16.5
WD 100 t	265	195	100	88	36	23	234	164	22	M20	32	32	21
WD 200 t	350	263	140	120	54	25	310	220	26	M24	38	53.5	25

* Metric thread

Requirements of the Quality of both Contact Surfaces

WD 15 t ... 200 t

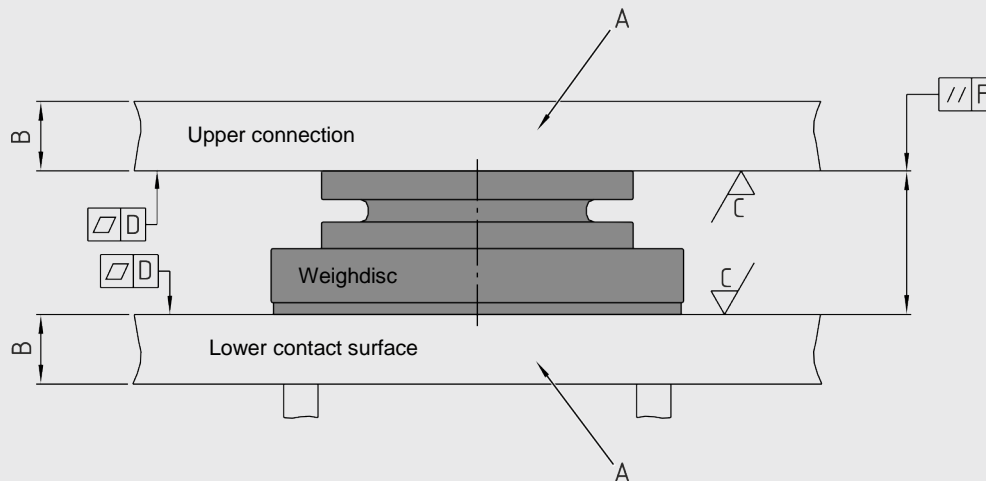

- **Material selection "A":**
As a rule, construction steel is used of at least S235 grade.
- **Operating thickness "B":**
This depends on the stiffness of the overall construction. The operating thickness of the contact surfaces must be large enough such that the deflection under the rated load is less than 0.05 mm.
- **Surface quality "C":**
The average peak-to-valley height required of the contact surfaces is 6.3 μm
- **Flatness "D":**
The maximum permissible flatness tolerance of each contact surface is 0.03 mm
- **Plane parallelism "F":**
The upper and lower contact surfaces to the Weighdisc must be plan parallel to each other within at least 0.1 mm

Installation note:

If the WD is mounted on an interim plate, the entire unit can be removed more easily. Otherwise, the entire load has to be dismantled in order to access the middle fixing screw.

Order numbers

Variants	Order Number
Weighdisc with plug connection and 15 m cable	
WD 15 t	V713566B01
WD 25 t	V713566B11
WD 50 t	V713566B21
WD 100 t	V713566B31
WD 200 t	V713566B41
Spare part: Plug socket with 15 m connecting cable	V090162B01
Adapter for the old connecting cable 15 m	V036069B10

